



G-262 Heavy Duty Cable Tightener Instructions

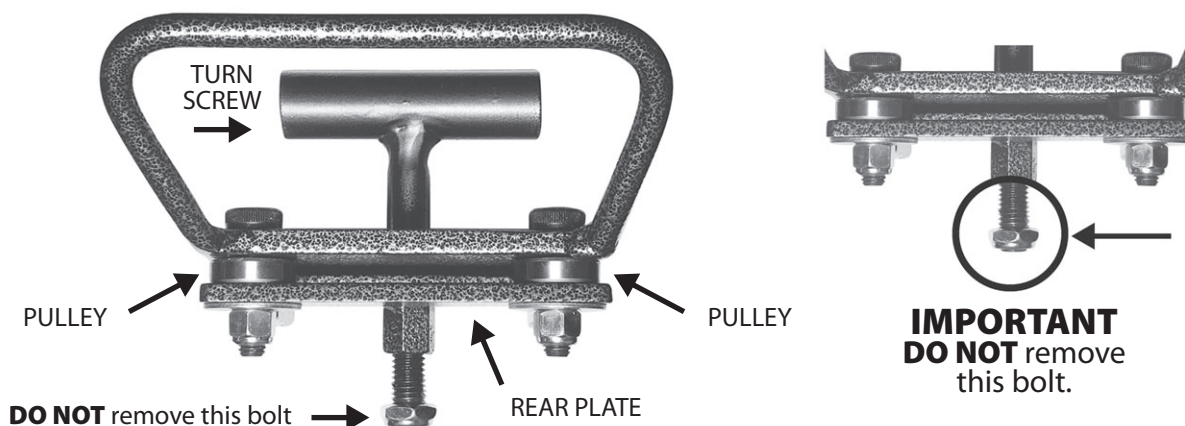


This Cable Tightener was inspected before it shipped, upon receipt inspect your Cable Tightener to ensure it operates correctly. Make sure the turn screw thread turns smoothly to open the rear plate. Make sure the two small pulleys that the guy cables ride on turn smoothly. These are the only moving parts. **NOTE: DO NOT loosen or remove the bolt at the very end of the turn screw threads or attempt to remove the turn screw.**

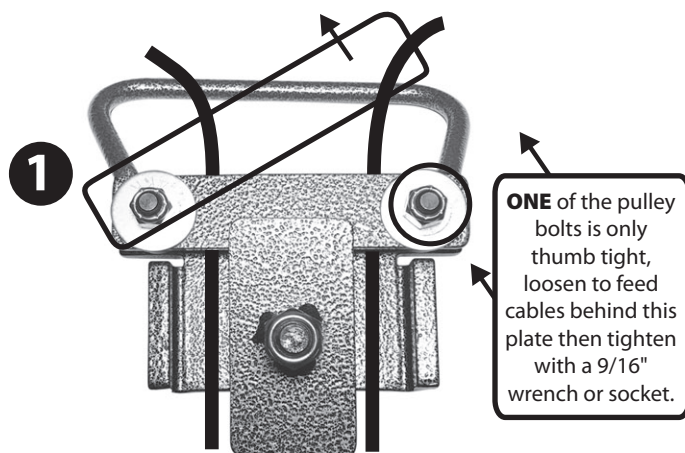


Turn the turn screw counter clockwise until the rear plate can clear the pulleys and rotate as illustrated. The guy cables will ride on the inside of the pulleys.



With the guy cables inside the device, rotate the rear plate so the two pulleys fit through the two holes in the rear plate and loosely tighten so cables can still move easily through the device.

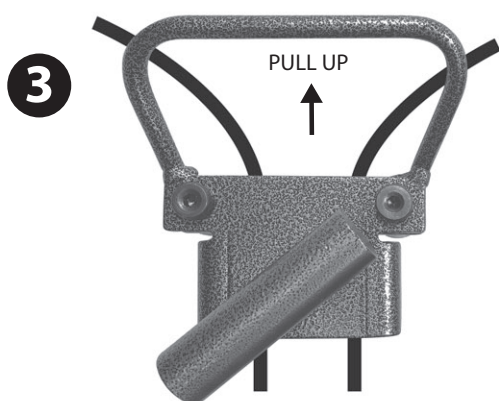

Using the metal handle pull the device up until the desired cable tension is obtained then firmly tighten the turn screw.

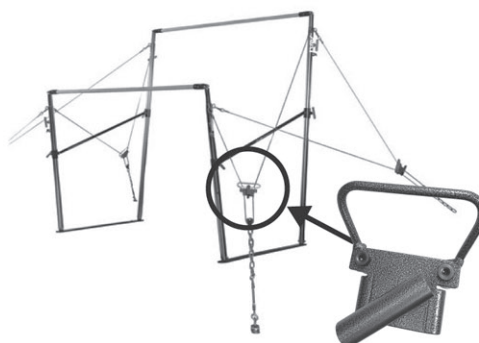

Please note that the top handle should always be facing up and the turn handle should always be facing away from the bars.

If you have any questions about the use of this equipment please contact the seller.