




AMERICAN ATHLETIC, INC  
200 AMERICAN AVE.  
JEFFERSON, IOWA 50129  
PHONE 515-386-3125


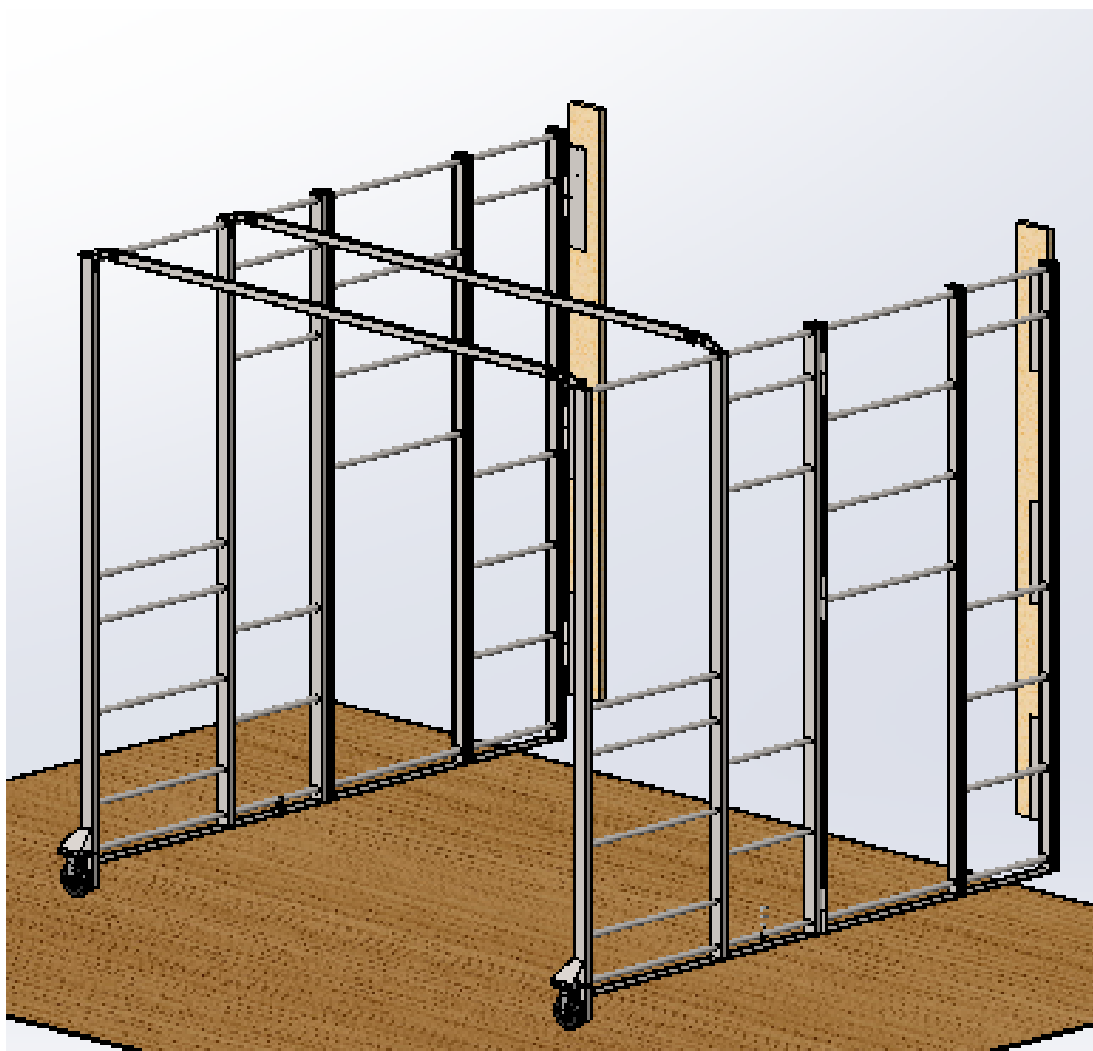


G2N



MODEL NUMBER G2N	LAST REVISION DATE 1/15/2018	INSTRUCTION NO. 82251
---------------------	---------------------------------	--------------------------

**Assembly Instructions:**


To install the unit you will need approximately 119" of ceiling height. Finished height is approximately 115". It is recommended that you use a wood 2x6 or 2x8 to attach to the wall. Pre drill the 7/16" holes for the hinges using the hinges as a template. Using the elevator bolts supplied place them through the back of the wood and tap them into the wood until they are seated. Note: hinges should be flush with the edge of the wood. Once the wood is attached to the wall place the hinges on and using the 3/8 flat washer and the 3/8 nylock nut slightly tighten being able to still move the hinges by hand. Note: if installing a two section unit read below for dimensions.

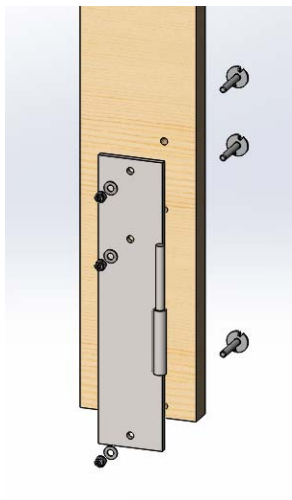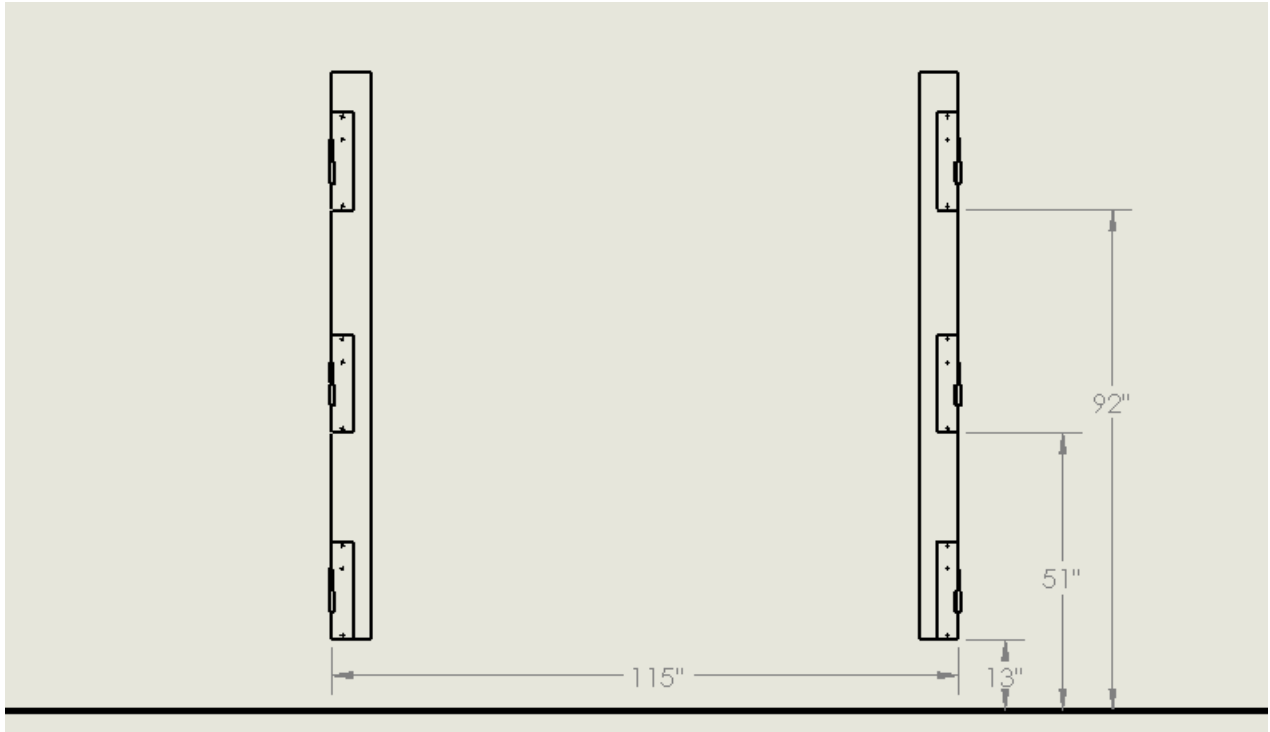



Next locate the inner wall and stand it up next to the hinges. Flat plate is the bottom of the wall and the hinge tubes on the inner wall will be on the inside. The outer wall has the lugs on the top and the hinge tube on the outside of the wall. Align the hinge tube on the inner wall with the hinge rods on the hinges and slide down. Hinges may need to be moved around to get aligned. Once the wall is fully seated on the hinges, tighten the nuts on the hinges. Next locate the outer wall and align the hinge tubes and slide it down until fully seated.

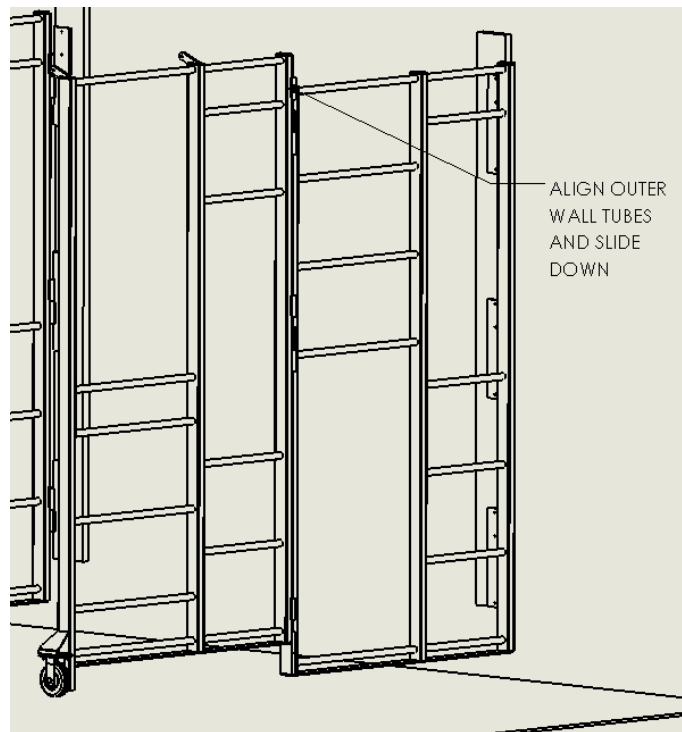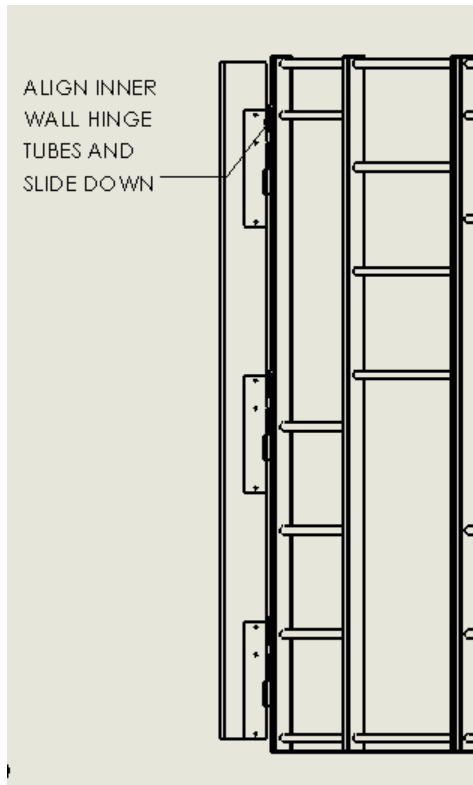


Next locate the braces. Using the bolt and nut attach the braces to the left side of the section and using the pin on the other end to attach to the right side. Some adjustment to the brace may be necessary to make sure the walls are straight. Loosen the two bolts on the end of the brace and just then tighten the bolts. With walls straight lock the wheels into place.

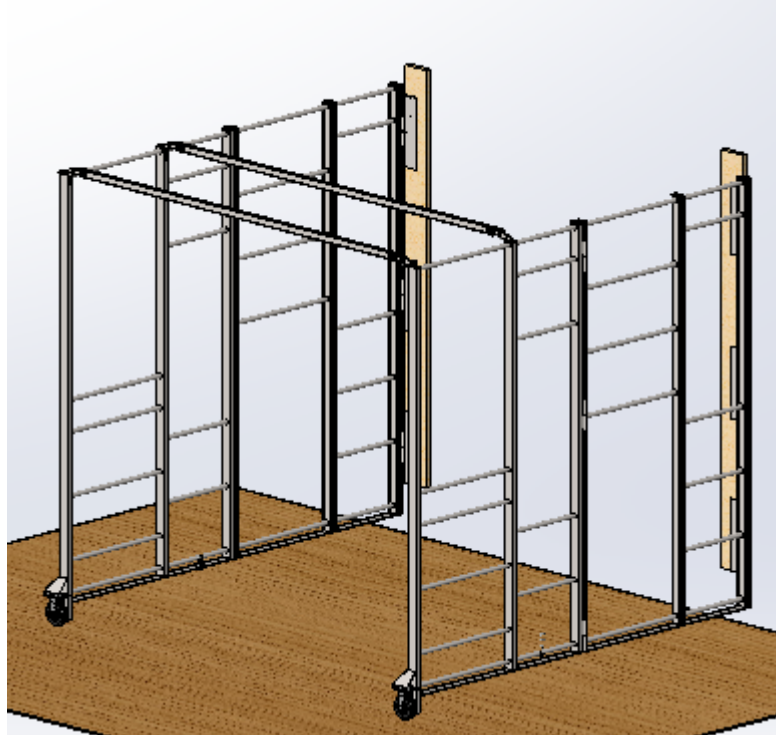

To fold the unit up for storage. Unlock the brake from the wheels. Remove the pins from the one end of the braces. Let the braces hang from the bolted end and fold the walls in half while folding toward the wall.

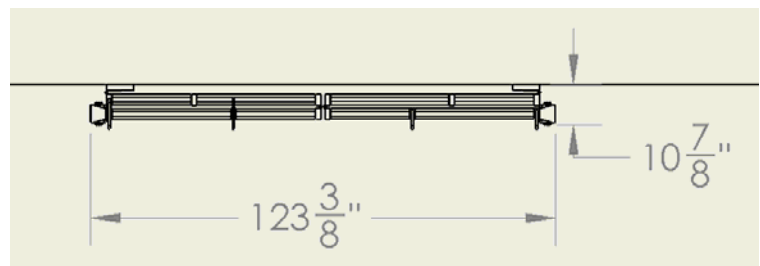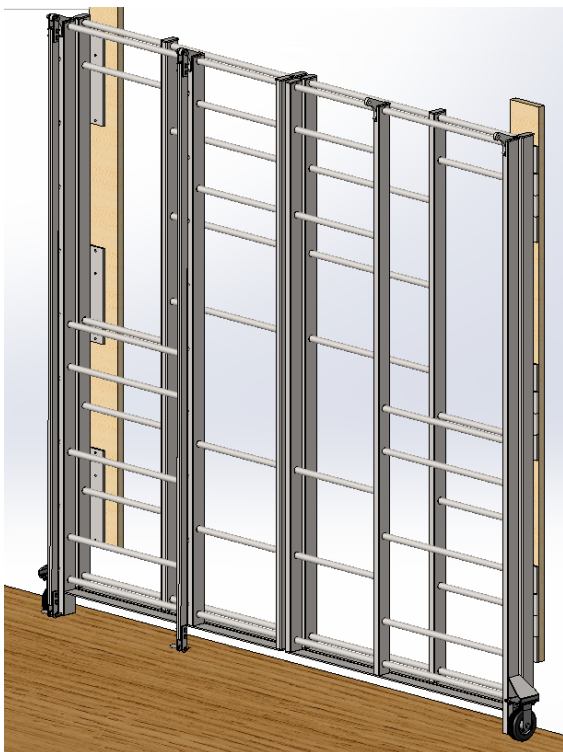



If you have purchased a two section unit below is the dimension for the second section for the hinges. Note: The two section unit will come with the left side extra wall. If you are purchasing a second section later and already have the one section installed you will need to stand in the front of the unit and order a right wall or a left wall. Right wall will have the same dimension as below.

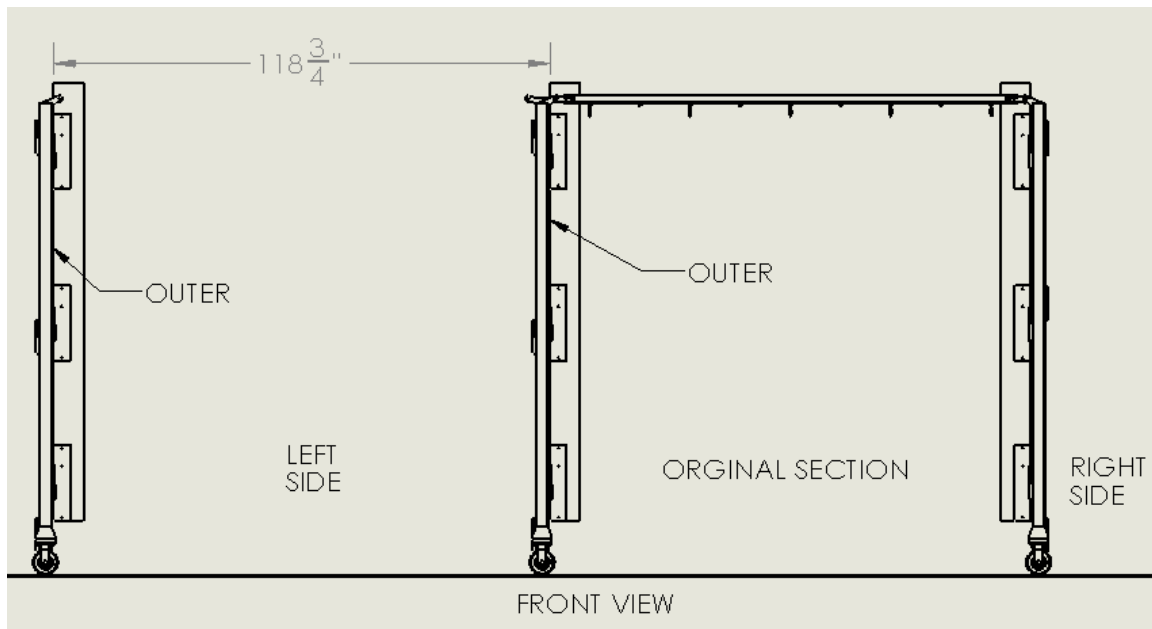

Part numbers are below

0405231	MONKEY BARS	0405056	WARP WALL FRONT INCLINE
0405232	CROSS BAR	0405057	WARP WALL INNER INCLINE
0405238	CARGO NET	0405058	WARP WALL BLOCK-EACH
0405239	ROPES (4)	0405055	WARP WALL COMPLETE
0405237	RINGS (4)	0480313	G2N SMALL OCTAROCK
0405234	FLOATING PLANK	0480314	G2N MED OCTAROCK
0405233	SOLID PLANK	0480315	G2N LRG OCTAROCK
0405235	CLIMBING WALLS (2)	0409572	G2N BARRIER-2 LAYER
0405236	PLANK LEG PKG	0409568	G2N BARRIER-3 LAYER
0405241	MONKEY BAR LEG PKG	0409563	G2N BARRIER-4 LAYER
0405251	SLIDE BAR	0480309	G2N SLANTED STEP
0405244	RUNG PADS (23)	0480310	G2N SLANTED STEP-SET OF 4
0405242	RING TRAINER-SM	0409561	INCLINE W/ ANTI-SKID
0405240	RING TRAINER-MD	0409560	THROW MAT 4'9"X10' V2
0405243	RING TRAINER-LG	B416786	CBF 6'X42'
0405252	WALL UNIT -1 SECTION	0405256	G2N PACKAGE 1
0405253	WALL UNIT-2 SECTION	0405257	G2N PACKAGE 2
0405254	LEFT SECTION WALL	0405258	G2N PACKAGE 3
0405255	RIGHT SECTION WALL	0405259	G2N PACKAGE 4



To use the ropes, attach the single bar to any rungs that are at the same level with each other. To attach the bar, pull the spring lock to release the locking bar. Place over the rung and swing the locking bar up and pull the spring lock and align the locking plate hole up with the spring lock and let it snap into place. Hang the ropes using the pear shaped quick link and tighten.

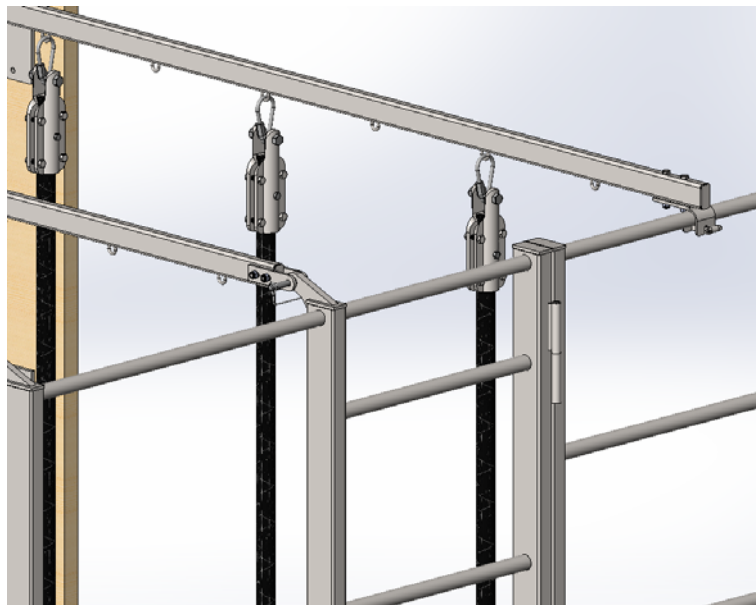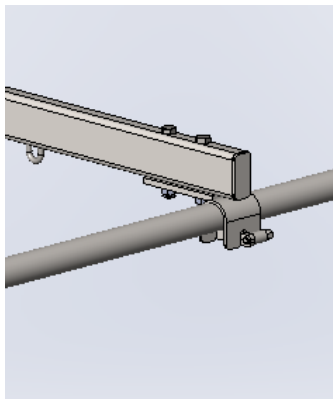

AMERICAN ATHLETIC, INC  
200 AMERICAN AVE  
JEFFERSON, IA 50129  
800-247-3978

MODEL NO.G2N  
INSTRUCTION SHEET NO.82251  
DATE:1/15/2018

To use the rings, attach the single bar to any rungs that are at the same level with each other. To attach the bar, pull the spring lock to release the locking bar. Place over the rung and swing the locking bar up and pull the spring lock and align the locking plate hole up with the spring lock and let it snap into place. Hang the rings using the pear shaped quick link and tighten.

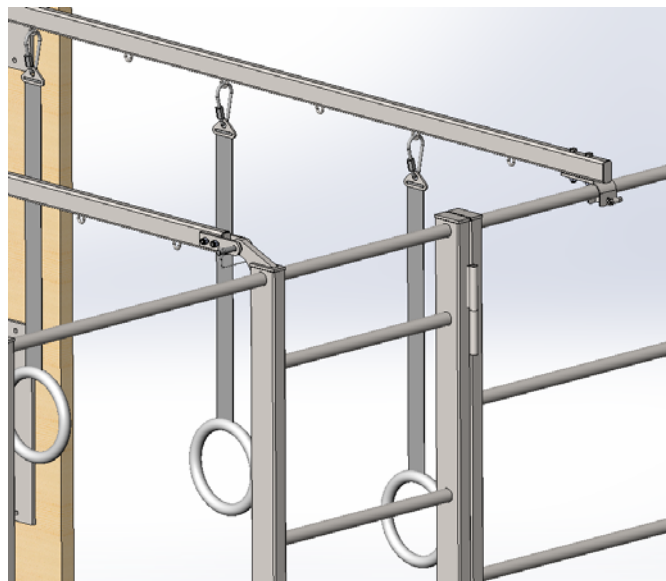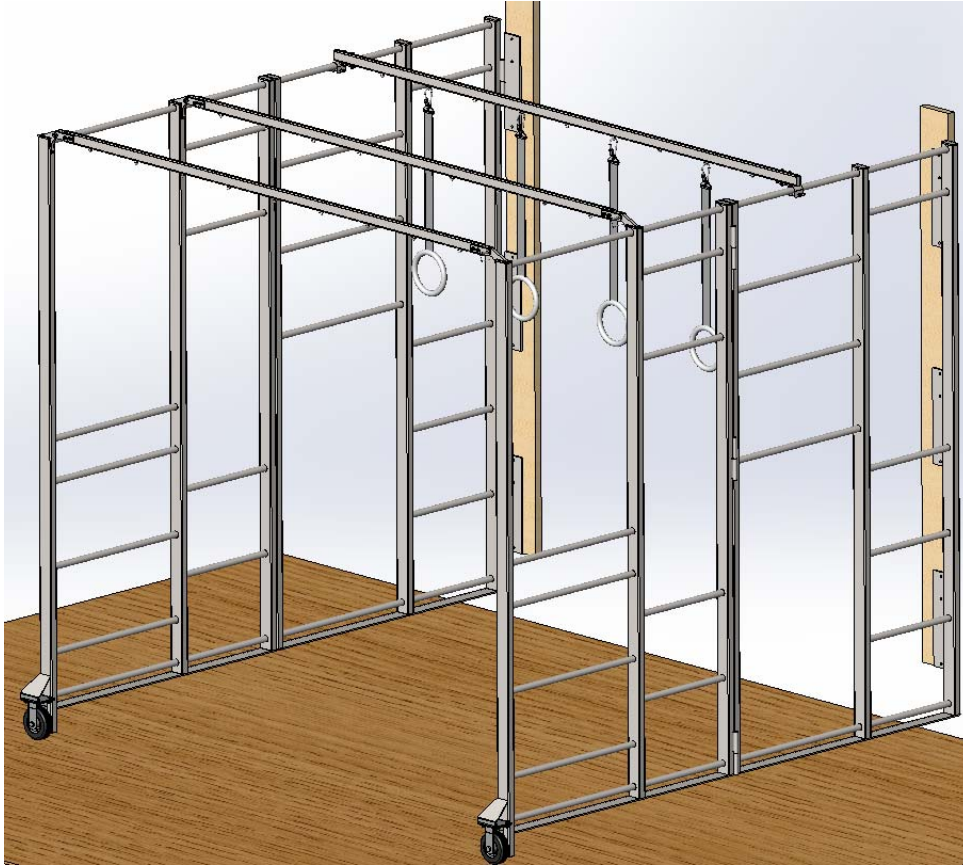




AMERICAN ATHLETIC, INC  
200 AMERICAN AVE  
JEFFERSON, IA 50129  
800-247-3978



MODEL NO.G2N  
INSTRUCTION SHEET NO.82251  
DATE:1/15/2018

To use the cargo net attach to the first or second brace using the pear shaped quick links and tighten. Locate the two straps and attach to the bottom on each side.

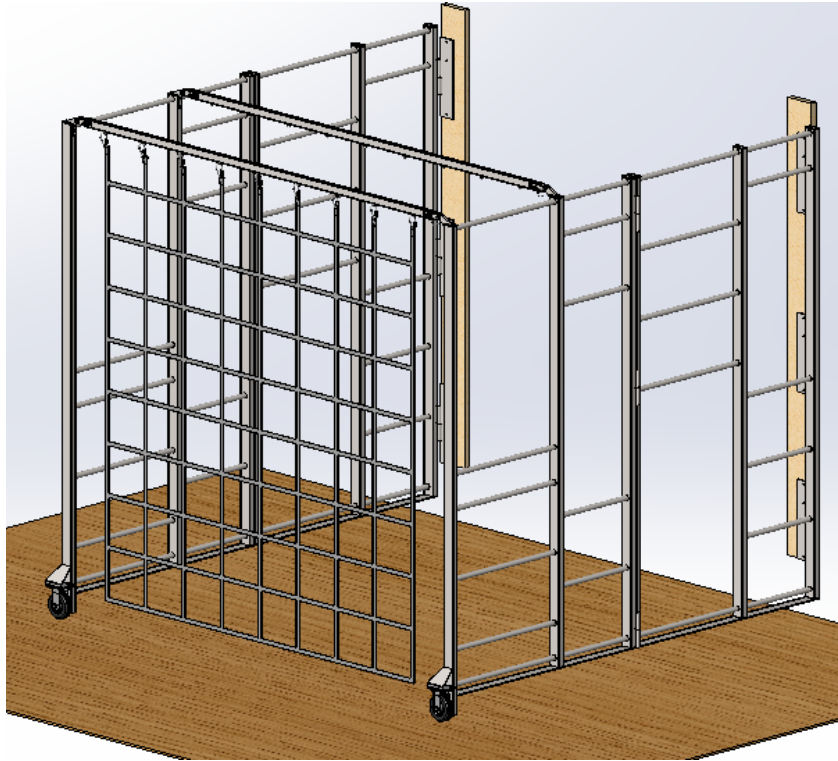





The solid plank can go on any rung at the same level. Make sure that locks are secure.  
There is also a plank leg package the can be purchased to be used as seen below.

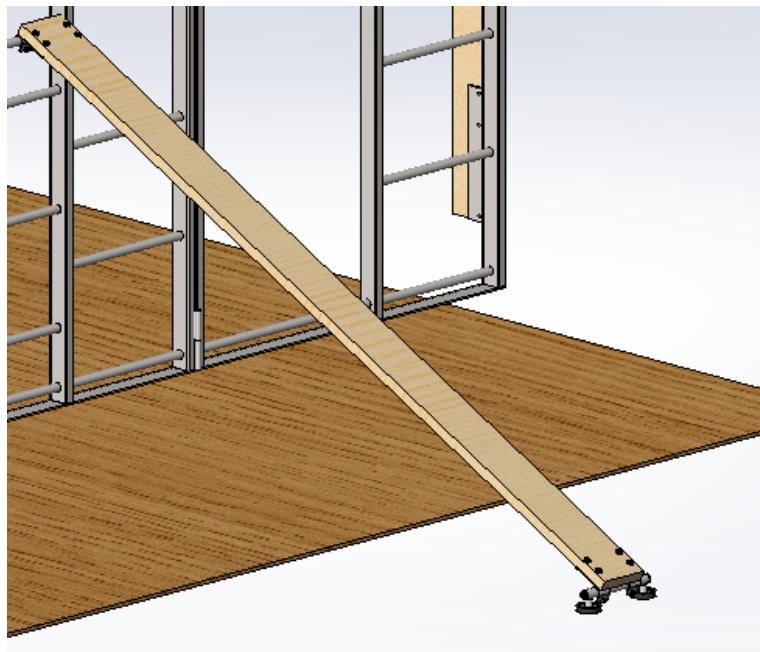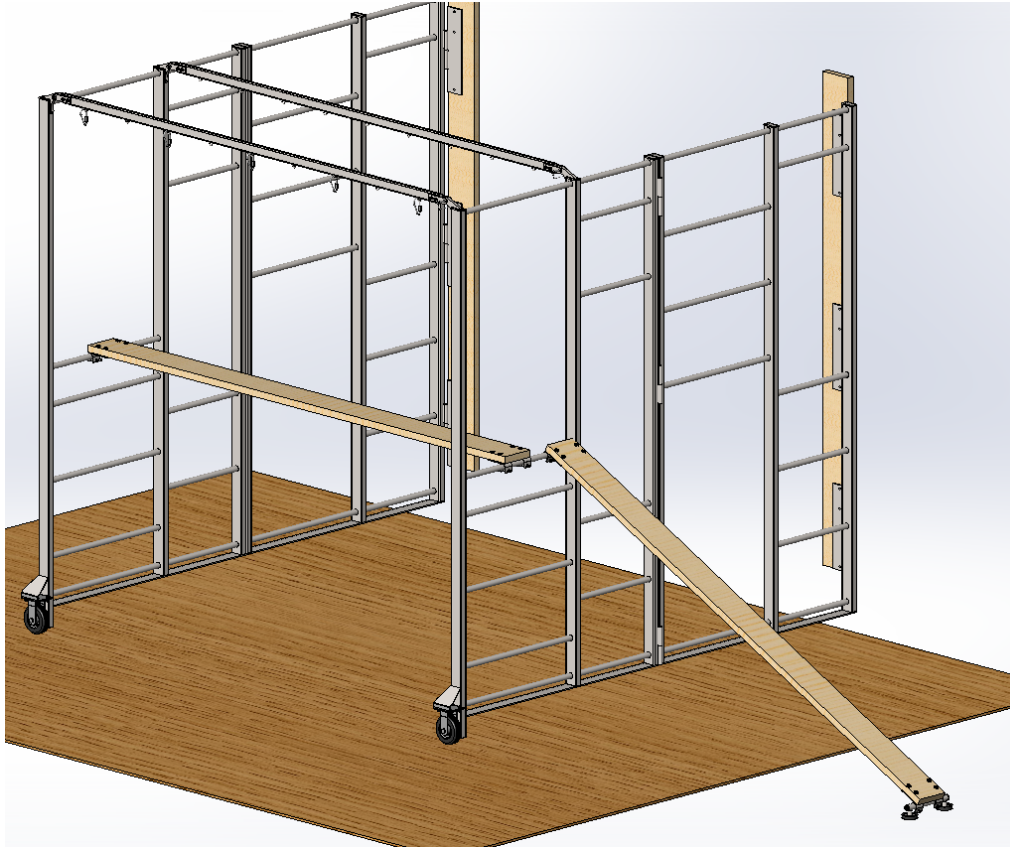

AMERICAN ATHLETIC, INC  
200 AMERICAN AVE  
JEFFERSON, IA 50129  
800-247-3978

MODEL NO.G2N  
INSTRUCTION SHEET NO.82251  
DATE:1/15/2018


The monkey bars can fit on any rungs that are level with each other. Make sure that locks are secure. There is also a leg package for this that can be used like the plank.

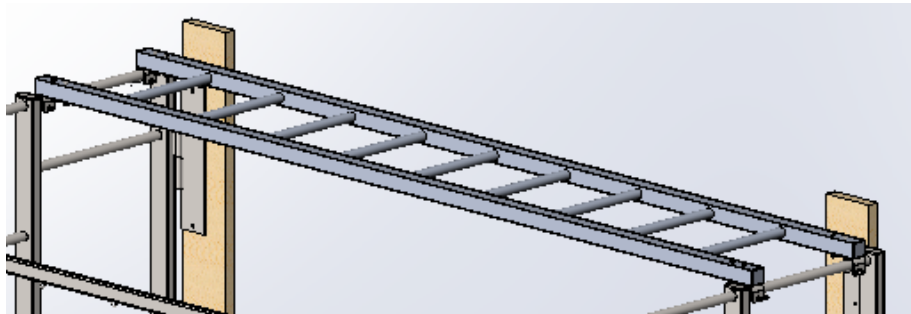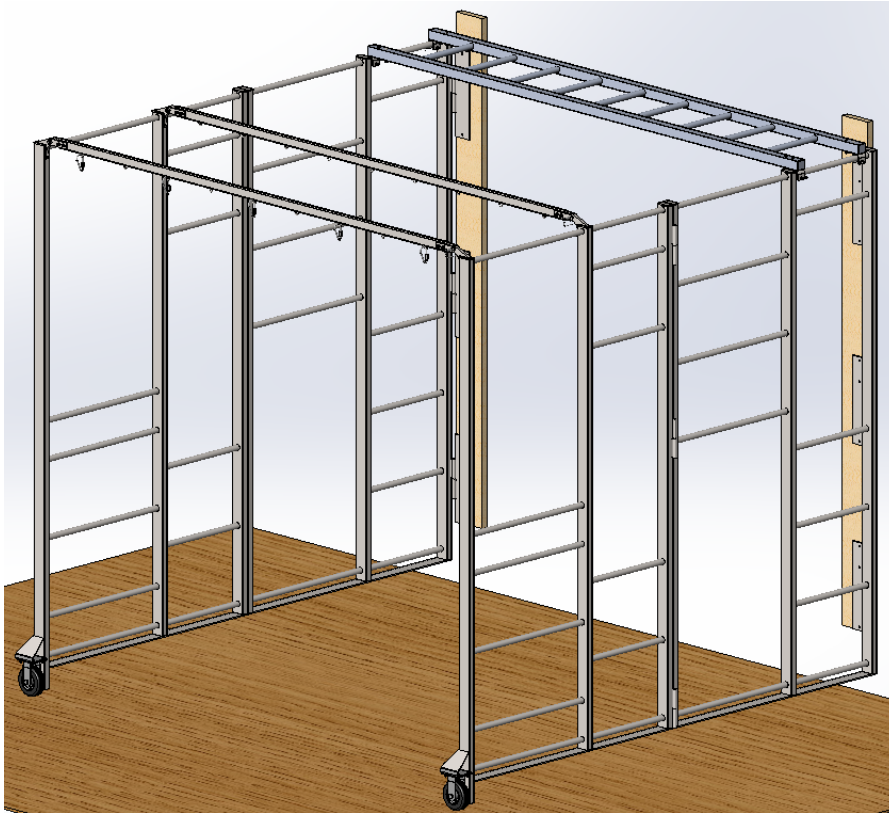

AMERICAN ATHLETIC, INC  
200 AMERICAN AVE  
JEFFERSON, IA 50129  
800-247-3978

MODEL NO.G2N  
INSTRUCTION SHEET NO.82251  
DATE:1/15/2018



The slide bar can only be used on the rungs as seen below. To attach you would need to slide the ring on first and attach the locks the same as the single bar.

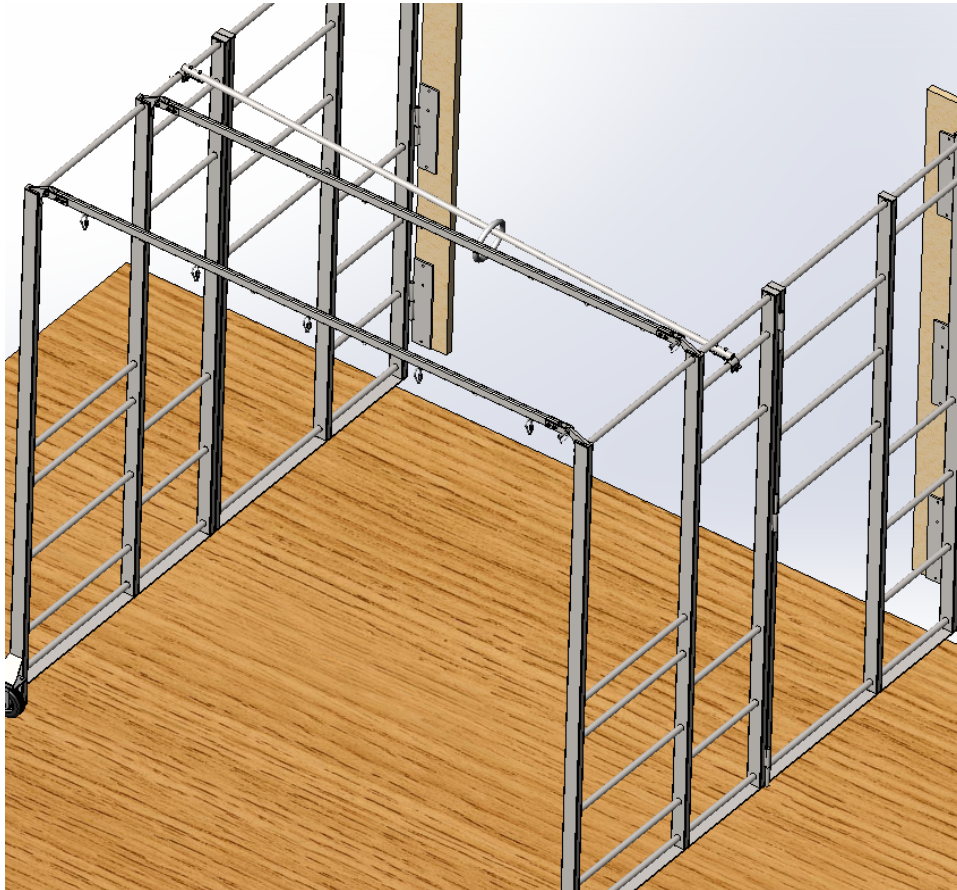

AMERICAN ATHLETIC, INC  
200 AMERICAN AVE  
JEFFERSON, IA 50129  
800-247-3978

MODEL NO.G2N  
INSTRUCTION SHEET NO.82251  
DATE:1/15/2018

To attach the ring trainer you need to hang the bracket as shown and lock the locking plates to secure it. Attach the pear shaped quick links to the bracket, attach the straps and then attach the other two pear shaped quick links then attach the pulleys and tighten all quick links. Attach the belt with the snap links to the D-rings on the belt. When wearing the belt you must attach the two leg straps and tighten.

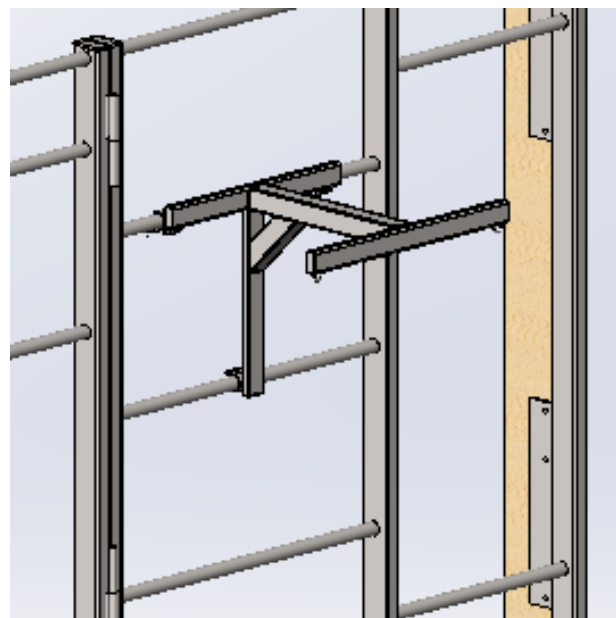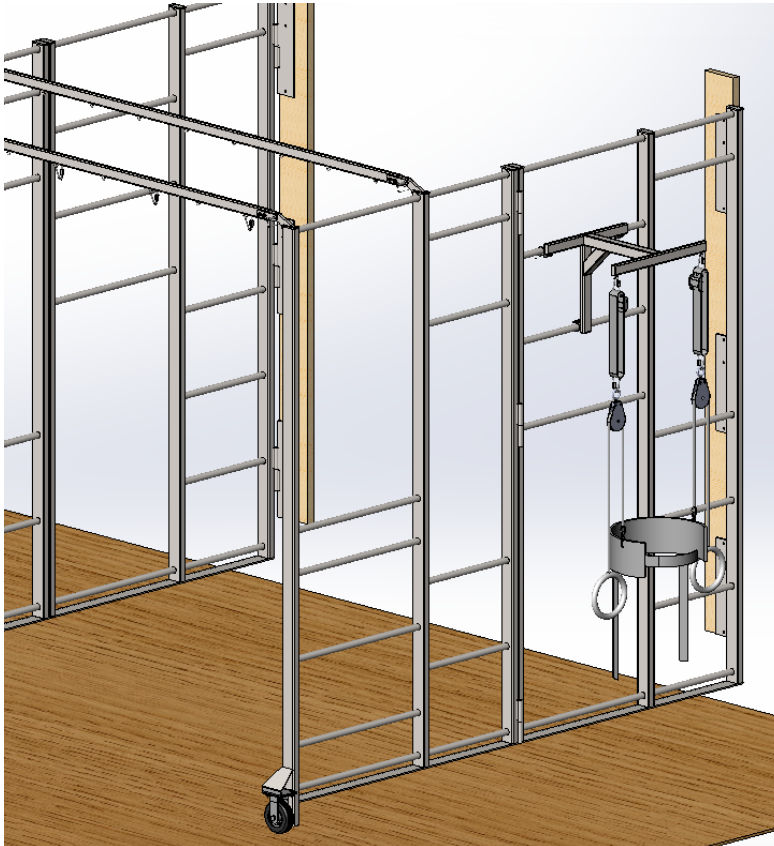




AMERICAN ATHLETIC, INC  
200 AMERICAN AVE  
JEFFERSON, IA 50129  
800-247-3978

MODEL NO.G2N  
INSTRUCTION SHEET NO.82251  
DATE:1/15/2018



To mount the climbing walls you will need the correct hardware to attach to your wall. Locate the boards and the labels left and right. The labels are the top and when standing in front of the unit the left would go on your left. Secure to wall. If the unit is mounted as in the instructions the walls will still be able to fold closed.

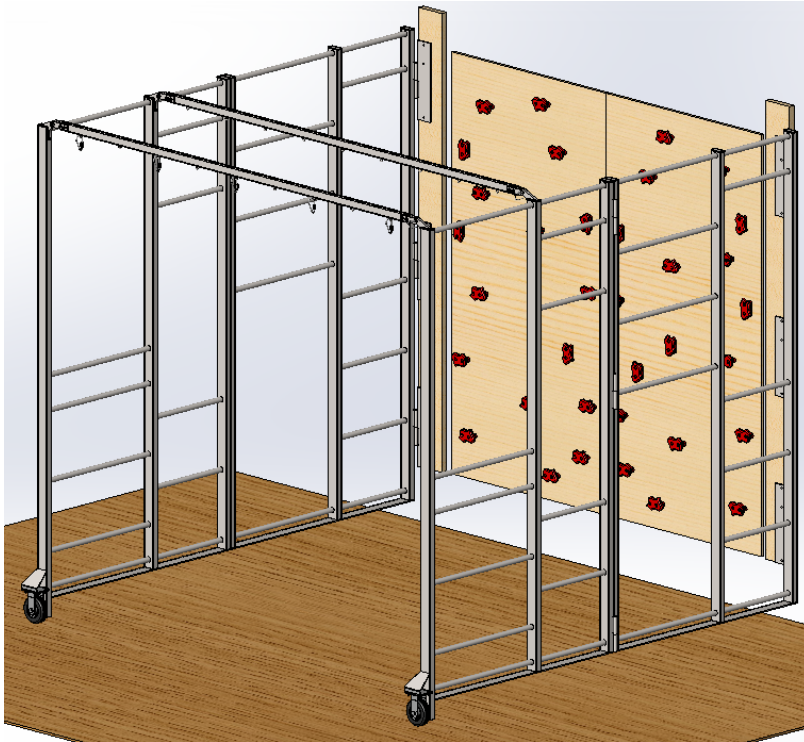


AMERICAN ATHLETIC, INC  
200 AMERICAN AVE  
JEFFERSON, IA 50129  
800-247-3978

MODEL NO.G2N  
INSTRUCTION SHEET NO.82251  
DATE:1/15/2018


To use the floating plank, locate the plank, straps and the quicklinks. Attach the quicklinks to the braces and straps the attach the second quicklink the the strap and the plank. Tighten all quicklinks.

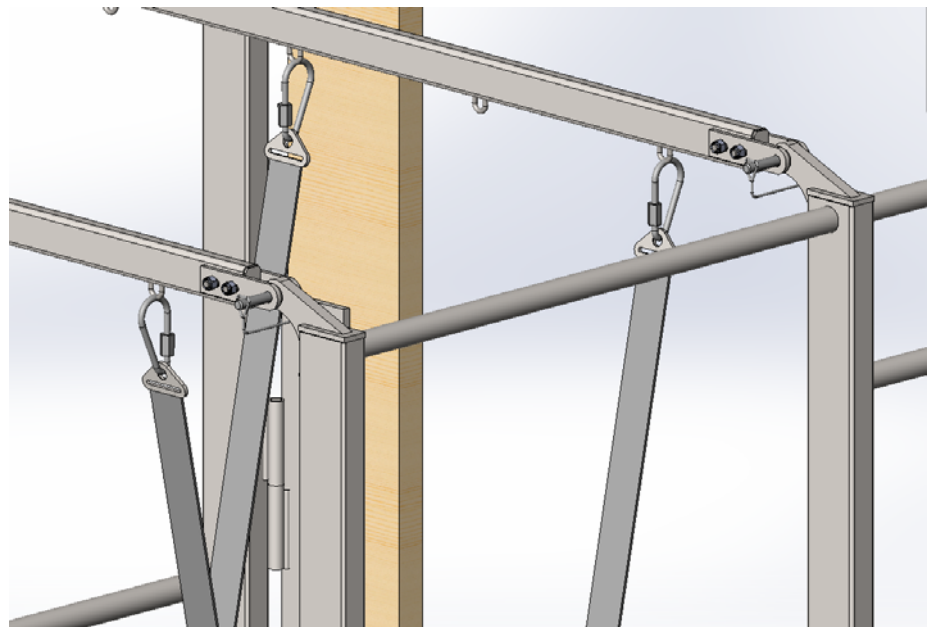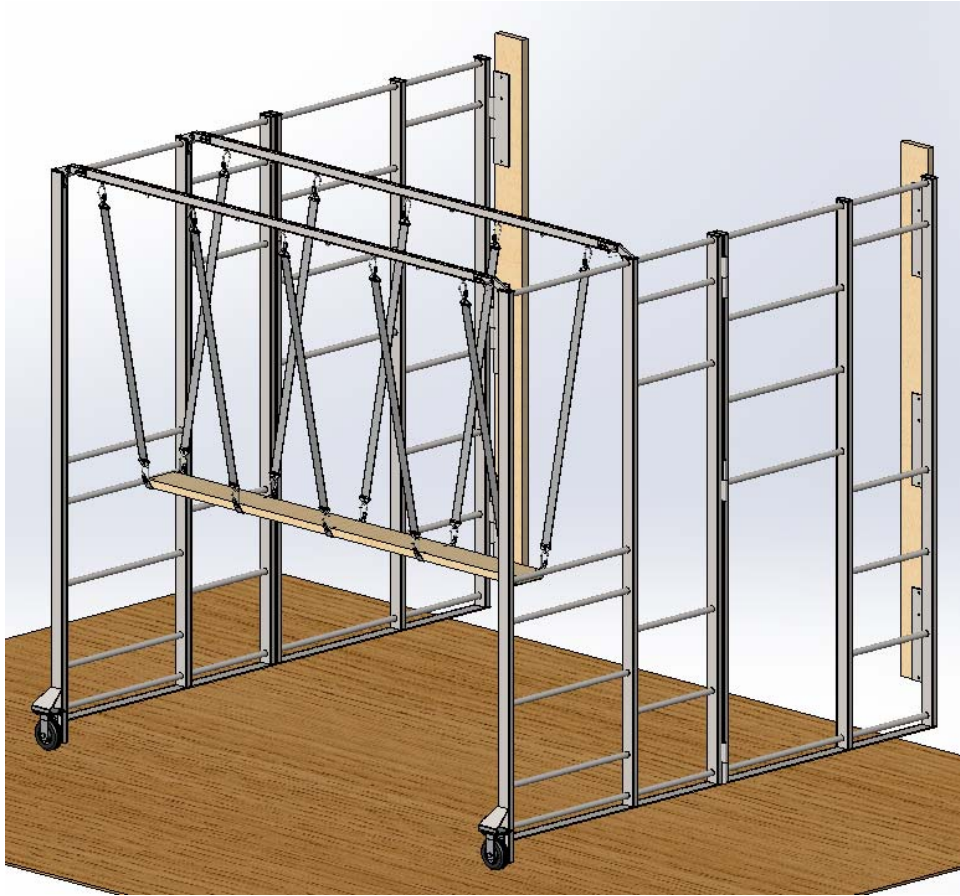

Attach the pad for the floating plank on each end using the hook and loop straps.

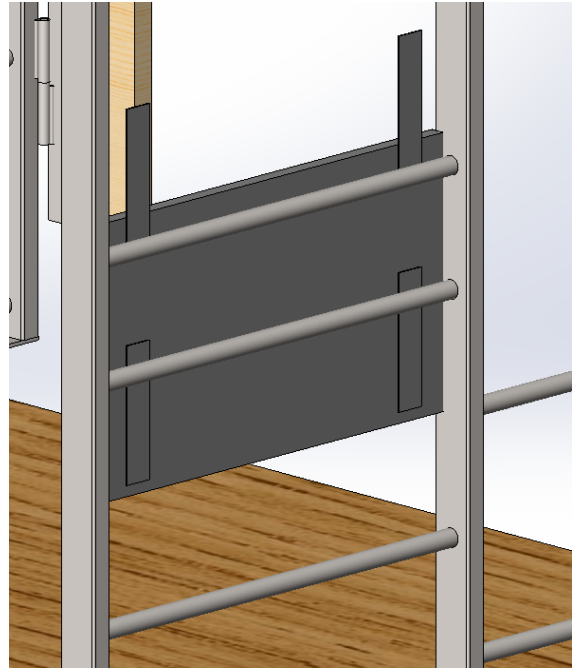

To use the foam rung pads, wrap the foam around the rung then using the vinyl cover wrap it around the foam and secure with the hook and loop.

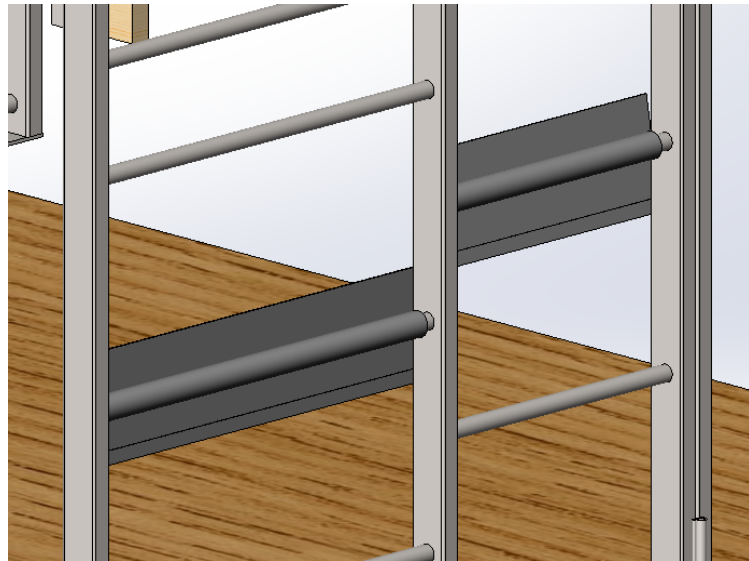

**CAUTION:**

This equipment is to be used only under adult supervision. Any mechanical system when used incorrectly, poses a risk of injury to the user. This equipment is intended to be setup, adjusted, maintained and/or used only by those who understand the risks involved and are qualified to take responsibility for using it as designed. By setting up, adjusting, maintaining, and/or using this equipment, the user implies that they understand the potential risks and assumes responsibility for their own safety and the safety of those around them with regard to using this equipment.